




HARNESSES

SPARTA




COMPLETE PROFESSIONAL HARNESS FOR FALL PROTECTION SYSTEMS, POSITIONING, ROPE ACCESS WORK

- Large padding for maximum comfort during use, lightened waistband padding to increase breathability
- Equipped with three anchor points (ventral, sternal and dorsal) and two lateral positioning rings, all in light alloy
- The upper part can be completely disconnected from the lower part for inspection and cleaning purposes
- Two special loops are provided on the shoulder straps to connect the vertical recovery system if required

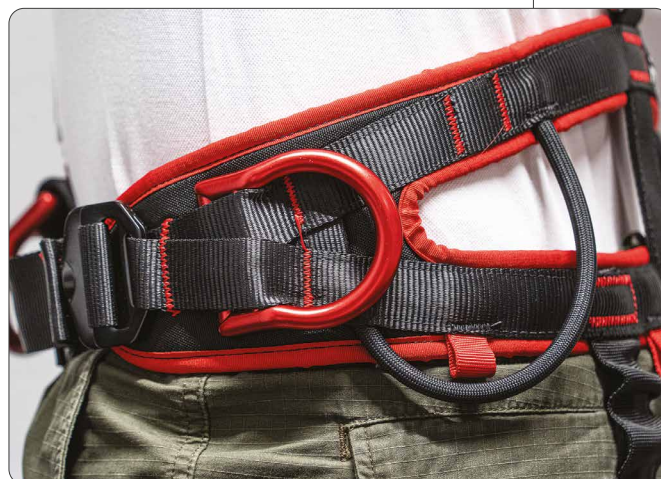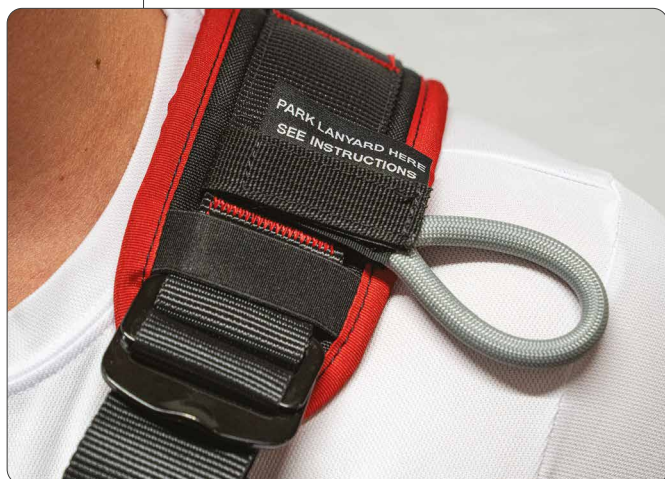

CODES AND CHARACTERISTICS

CODE	standard	A [cm] [in]	B [cm] [in]	size	weight [g]	pcs
SPARTAS	CE - EN 361 - EN 358 - EN 813 EN 12277/A/C	76/94 29 15/16 - 37	50/60 19 3/4 - 23 5/8	S	1650	1
SPARTAML	CE - EN 361 - EN 358 - EN 813 EN 12277/A/C	84/102 33 1/16 - 40 3/16	58/66 22 13/16 - 26	M/L	1700	1
SPARTAXL	CE - EN 361 - EN 358 - EN 813 EN 12277/A/C	90/126 35 1/2 - 49 5/8	60/74 23 5/8 - 29 1/8	XL	1750	1



1. EN 361 | 15 kN
2. EN 358 - EN 813 | 15 kN
3. EN 358 | 15 kN