

# S50

## HIGHLY-RESISTANT POST BASE

### MIGHTY

Characteristic compression strength of more than 300 kN. Ideal for large columns.

### RAISED

It ensures spacing from the ground to avoid water splashing or stagnation and provides high durability. Hot-dip galvanisation ensures durability in outdoor contexts.

### ATTENTION TO DETAILS

The base features four auxiliary holes for inserting screws using a long bit.



USA, Canada and more design values available online.



VIDEO



ETA-10/0422

SERVICE CLASS



MATERIAL


S235  
HDG55

S235 carbon steel with hot galvanising  
55 µm

GROUND CLEARANCE


from 144 to 272 mm

EXTERNAL LOADS



VIDEO

Scan the QR Code and watch the video on our YouTube channel

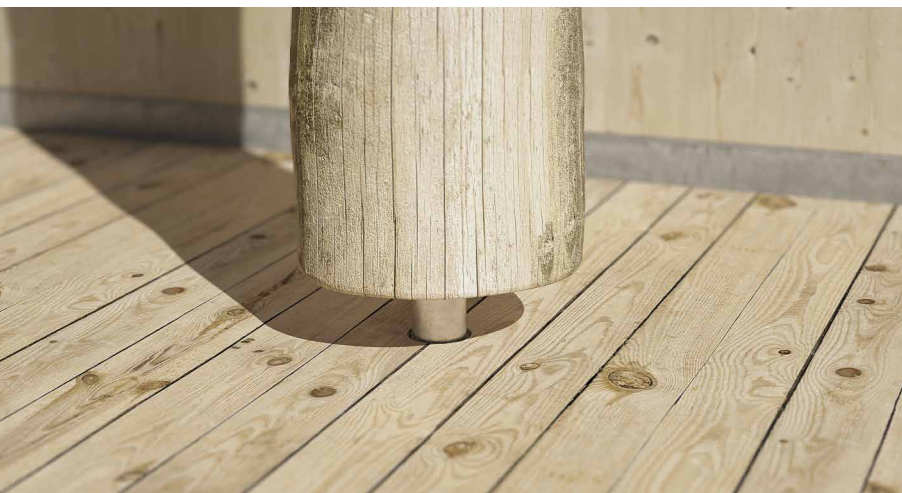

### FIELDS OF USE

Ground joints for compressed columns.  
Canopies, columns supporting roofs or floors.

Suitable for columns in:

- solid timber softwood and hardwood
- glulam, LVL



## HEAVY STRUCTURES


Ideal for transferring high compression forces deriving from large columns. Excellent durability of the column thanks to the tubular that generates the riser.

## TOLERANCE

The height can be adjusted with a nut and lock nut system, adding bedding grout after installation.

## CODES AND DIMENSIONS


CODE	H	P	top plate	top holes	bottom plate	lower holes	rod $\varnothing$ x L	pcs
	[mm] [in]	[mm] [in]	[mm] [in]	[n. x mm] [n. x in]	[mm] [in]	[n. x mm] [n. x in]	[mm] [in]	
<b>S50120120</b>	144 5 11/16	120 4 3/4	120 x 120 x 12 4 3/4 x 4 3/4 x 0.47	4 x $\varnothing$ 12 4 x $\varnothing$ 0.47	160 x 160 x 12 6 1/4 x 6 1/4 x 0.47	4 x $\varnothing$ 13 4 x $\varnothing$ 0.51	M20 x 120 0.79 x 4 3/4	1
<b>S50120180</b>	204 8 1/16	180 7 1/8	120 x 120 x 12 4 3/4 x 4 3/4 x 0.47	4 x $\varnothing$ 12 4 x $\varnothing$ 0.47	160 x 160 x 12 6 1/4 x 6 1/4 x 0.47	4 x $\varnothing$ 13 4 x $\varnothing$ 0.51	M20 x 120 0.79 x 4 3/4	1
<b>S50160180</b>	212 8 3/8	180 7 1/8	160 x 160 x 16 6 1/4 x 6 1/4 x 0.63	4 x $\varnothing$ 12 4 x $\varnothing$ 0.47	200 x 200 x 16 8 x 8 x 0.63	4 x $\varnothing$ 13 4 x $\varnothing$ 0.51	M24 x 150 0.79 x 6	1
<b>S50160240</b>	272 10 11/16	240 9 1/2	160 x 160 x 16 6 1/4 x 6 1/4 x 0.63	4 x $\varnothing$ 12 4 x $\varnothing$ 0.47	200 x 200 x 16 8 x 8 x 0.63	4 x $\varnothing$ 13 4 x $\varnothing$ 0.51	M24 x 150 0.79 x 6	1



## FASTENERS

HBS PLATE EVO - C4 EVO pan head screw


CODE	d <sub>1</sub>	L	b	TX	pcs
	[mm]	[mm]	[mm]		
<b>HBSPLEVO880</b>	8	80	55	TX 40	100



**C4**  
EVO  
COATING

VGS EVO - C4 EVO fully threaded screw with countersunk head

CODE	d <sub>1</sub>	L	b	TX	pcs
	[mm]	[mm]	[mm]		
<b>VGSEVO11100</b>	11	100	90	TX 50	25



**C4**  
EVO  
COATING

HUS A4 - C4 EVO turned washer

CODE	d <sub>VGS EVO</sub>	pcs
	[mm]	
<b>HUS10A4</b>	11	50




**A4**  
AISI 316


type	description		d	support	page
			[mm]		
<b>HBS PLATE EVO</b>	C4 EVO pan head screw		8		573
<b>SKR/SKR EVO</b>	screw-in anchor		12		528
<b>AB1</b>	CE1 expansion anchor		12		536
<b>ABE A4</b>	CE1 expansion anchor		M12		534
<b>VIN-FIX</b>	vinyl ester chemical anchor		M12		545

## GEOMETRY


S50120120  
S50120180

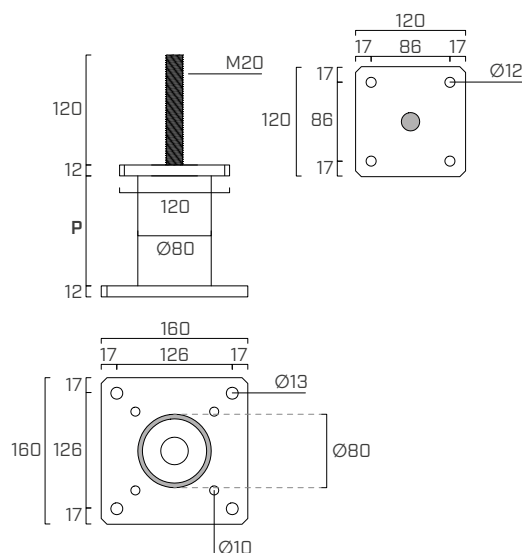


S50160180  
S50160240

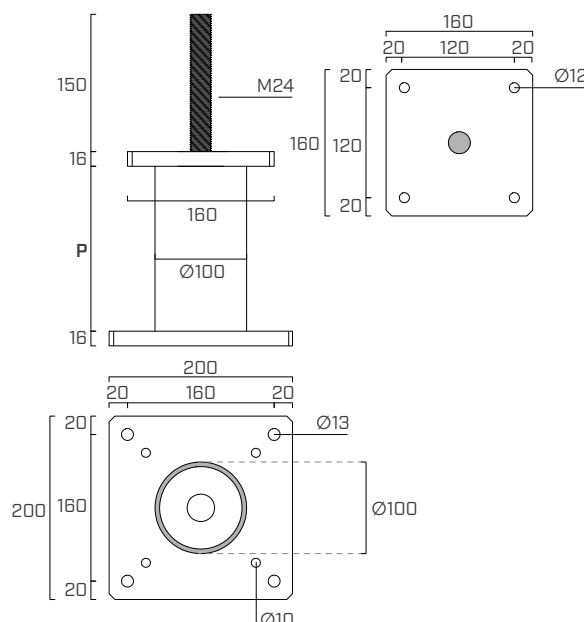



## MOUNTING



1

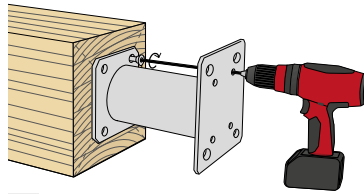


2



3

## STRUCTURAL VALUES

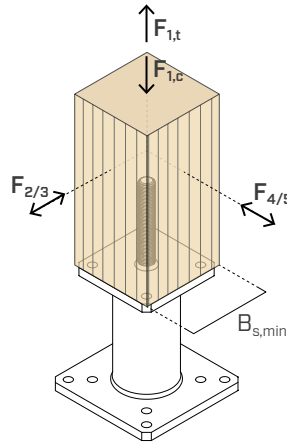

### COMPRESSION

CODE	$B_{s,min}$ [mm]	$R_{1,c}$ k timber		$R_{1,c}$ k steel	
		[kN]	$\gamma_{timber}$	[kN]	$\gamma_{steel}$
S50120120	120 x 120	200,0	$\gamma_{MT}^{(1)}$	157,0	$\gamma_{M0}$
S50120180		200,0		157,0	
S50160180	160 x 160	334,0	268,0		
S50160240		334,0	268,0		

### TENSION

### SHEAR

CODE	fasteners for timber		$R_{1,t}$ k timber		$R_{2/3}$ k timber = $R_{4/5}$ k timber	
	type	pcs - $\varnothing \times L$ [mm]	[kN]	$\gamma_{timber}$	[kN]	$\gamma_{timber}$
S50120120 S50120180	HBS PLATE EVO $\varnothing 8$	4 - $\varnothing 8 \times 80$	6,2	$\gamma_{MC}^{(2)}$	9,7	$\gamma_{MC}^{(2)}$
S50160180 S50160240	VGS EVO $\varnothing 11 + HUS10A4$	4 - $\varnothing 11 \times 150^{(3)}$	21,6		20,9	

### NOTES

<sup>(1)</sup>  $\gamma_{MT}$  partial coefficient of the timber.

<sup>(2)</sup>  $\gamma_{MC}$  partial coefficient for connections.

<sup>(3)</sup> Screw not compatible with post base S50120120.

The verification of the fastener-to-concrete connection must be carried out separately.

- A timber density of  $\rho_k = 350 \text{ kg/m}^3$  was considered for the calculation process.
- Dimensioning and verification of timber and concrete elements must be carried out separately.

### GENERAL PRINCIPLES

- Characteristic values are consistent with EN 1995-1-1:2014 and in accordance with ETA-10/0422.
- Design values can be obtained from characteristic values as follows:

$$R_d = \min \left\{ \begin{array}{l} \frac{R_{i,k \text{ timber}} \cdot k_{mod}}{\gamma_M} \\ \frac{R_{i,k \text{ steel}}}{\gamma_{Mi}} \end{array} \right.$$

The coefficients  $k_{mod}$ ,  $\gamma_M$  and  $\gamma_{Mi}$  should be taken according to the current regulations used for the calculation.

### UK CONSTRUCTION PRODUCT EVALUATION

- UKTA-0836-22/6374.