

BYTUM SPRAY

BITUMINOUS MEMBRANE SEALANT SPRAY



DAMP PROOF



SPRAY



READY TO USE



BITUMEN BASED

DURABLE PROTECTION

The product remains flexible and seals cracks and elements by blocking water and dust infiltration.

WEATHER RESISTANCE

The special elastomer-modified bituminous formula guarantees a product that after drying resists both weathering and salt corrosion.



TECHNICAL DATA

Properties	value	USC units
Time required for drying 23 °C / 50% RH ⁽¹⁾	1 - 2 h	-
Temperature resistance after drying	-10/+60 °C	+14/+140 °F
Yield ⁽¹⁾	4 m ²	43.06 ft ²
Application temperature (cartridge, support and ambient) ⁽²⁾	+5/+35 °C	+41/+95 °F
Transport temperature	+5/+35 °C	+41/+95 °F
Storage temperature ⁽³⁾	+5/+30 °C	+41/+86 °F
VOC	46 %/460 g/l	-

⁽¹⁾Average value that varies depending on the desired thickness of the layer.


⁽²⁾When application is complete, turn the can upside down and spray for 1-2 seconds so the nozzle stays clean.

⁽³⁾Store the product in a dry, covered location away from heat, open flames or other sources of ignition. Check the date of manufacturing on the packaging.

Waste classification (2014/955/EU): 16 05 04.
Aerosol 1. Skin Irrit. 2. STOT SE 3. Aquatic Chronic 2.

CODES AND DIMENSIONS

CODE	content		colour	
	[ml]	[US fl oz]		
BYTS	500	16.90	black	12

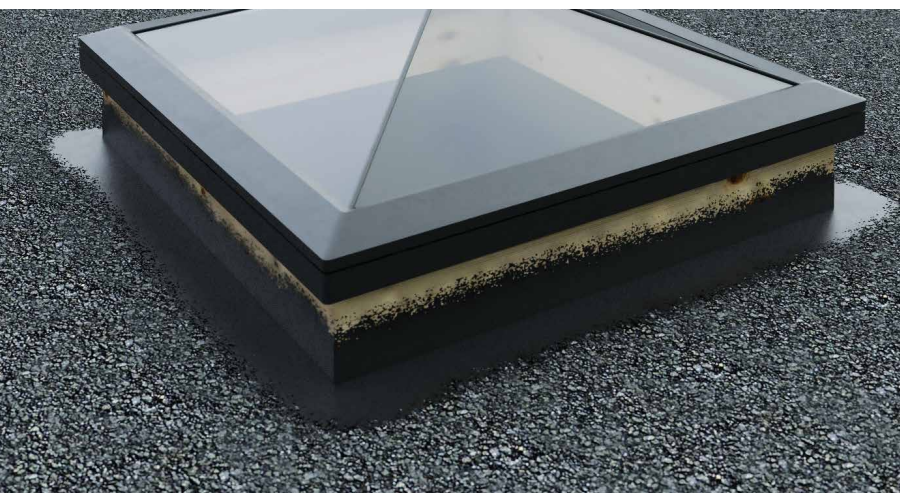

UNIVERSAL

Suitable for all types of support, it adheres to all types of shapes including roofs, gutters, terraces, skylights, PVC or metal drainpipes.

FAST INSTALLATION

The product is supplied in a convenient, resealable, ready-to-use spray can that can be applied without the need for additional tools.

RECOMMENDATIONS FOR INSTALLATION

SEALING OF CRACKS AND CROSSING POINTS



1 BYTUM REINFORCEMENT

FASTENING SYSTEMS WATERPROOFING

