

# RIDGE


## SUPPORT BATTEN METAL BATTEN-HOLDERS

### STABLE AND ADJUSTABLE

The different models are adjustable in height and available in various sizes to ensure the stability of the roof ridge without the need for foam or mortar.

### 4 VERSIONS

Wide range with different fixing and adjustment methods depending on the type of ridge and the thickness to be compensated for by the batten.

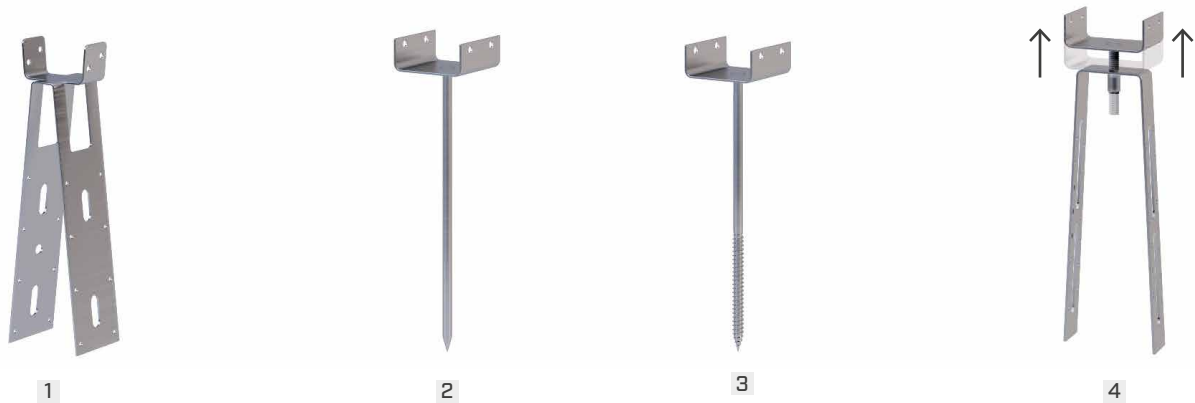


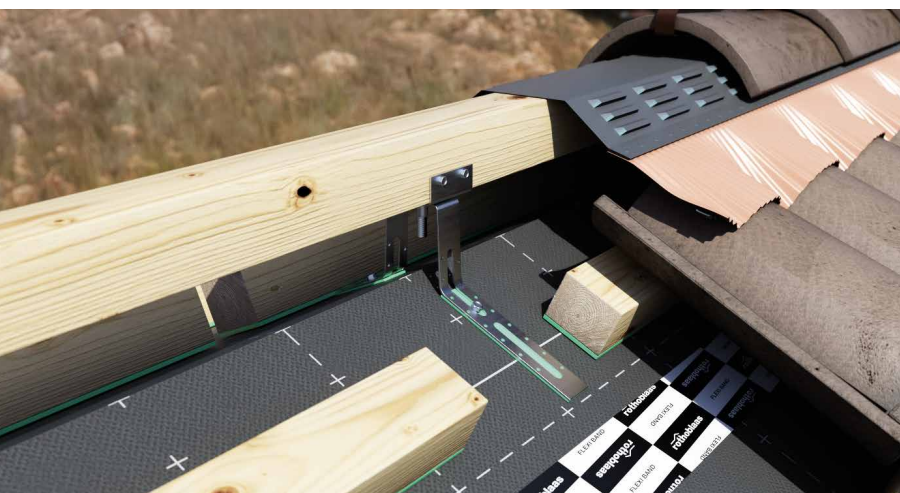
### CODES AND DIMENSIONS

CODE	H <sup>(1)</sup> [mm]	B [mm]	H <sup>(1)</sup> [in]	B [in]	version	material	
1 SUPPORTUNI	210	50	8.3	2.0	universal	DX51D steel	50
2 SUPPORTNAIL <sup>(2)</sup>	280	50	11.0	2.0	with nail	DX51D steel	50
3 SUPPORTSCREW	260	50	10.2	2.0	with screw	DX51D steel	50
4 SUPPORTLEVEL	205 - 235	50	8.3 - 9.5	2.0	adjustable	DX51D steel	50

<sup>(1)</sup>Total height.

<sup>(2)</sup>Products available only upon order.

 Waste classification (2014/955/EU): 17 04 05.



### VERSATILE


It can be adapted to any type of roof and be fixed on the most common rigid supports such as wood or concrete.

### MATERIAL

Made of steel for perfect durability and weather resistance.

## RECOMMENDATIONS FOR INSTALLATION

### 1 SUPPORTUNI

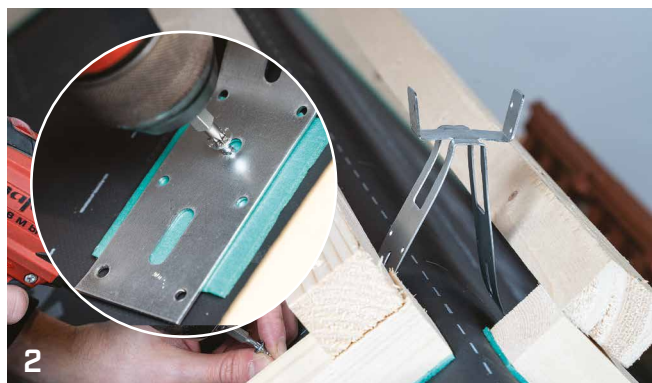

### 2 SUPPORTNAIL



### 3 SUPPORTSCREW



### 4 SUPPORTLEVEL

