


KOT

ROUND HEAD BOLT

- Round head bolt supplied with an incorporated nut (for the carbon steel version).
- Carbon steel of strength grade 4.8 for all round head bolts (KOT).
- Available in A2 | AISI304 austenitic stainless steel. Suitable for outdoor applications (SC3) up to 1 km from the sea and on class T4 acid wood.

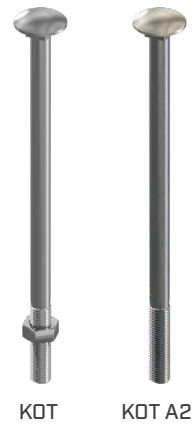

CODES AND DIMENSIONS


KOT - round head bolt with nut

4.8 steel class - electrogalvanized
DIN 603 (ISO 8677)

Zn
ELECTRO
PLATED

d	CODE	L	L	pcs
[mm] [in]		[mm]	[in]	
M8 0.32	KOT850	50	1 15/16	200
	KOT860	60	2 3/8	200
	KOT870	70	2 3/4	200
	KOT880	80	3 1/8	200
	KOT890	90	3 1/2	200
	KOT8100	100	4	100
	KOT8120	120	4 3/4	100
	KOT8140	140	5 1/2	50
M10 0.40	KOT10100	100	4	100
	KOT10120	120	4 3/4	50
	KOT10130	130	5 1/8	50
	KOT10140	140	5 1/2	50
	KOT10150	150	6	50
	KOT10160	160	6 1/4	50
	KOT10180	180	7 1/8	50
	KOT10200	200	8	50
	KOT10220	220	8 5/8	50

d	CODE	L	L	pcs
[mm] [in]		[mm]	[in]	
M12 0.48	KOT12200	200	8	25
	KOT12220	220	8 5/8	25
	KOT12240	240	9 1/2	25
	KOT12260	260	10 1/4	25
	KOT12280	280	11	25
	KOT12300	300	11 3/4	25



KOT A2 | AISI304 - round head bolt

A2 | AISI304 A2-70 stainless steel
DIN 603 (ISO 8677)

A2
AISI 304

d	CODE	L	L	pcs
[mm] [in]		[mm]	[in]	
M8 0.32	AI603850	50	1 15/16	100
	AI603860	60	2 3/8	100
	AI603870	70	2 3/4	50
	AI603880	80	3 1/8	50
	AI603890	90	3 1/2	50
	AI6038100	100	4	50
	AI6038120	120	4 3/4	50
	AI6038140	140	5 1/2	50
M10 0.40	AI60310120	120	4 3/4	50
	AI60310130	130	5 1/8	50
	AI60310140	140	5 1/2	50
	AI60310150	150	6	50
	AI60310160	160	6 1/4	50
	AI60310180	180	7 1/8	50
	AI60310200	200	8	50
	AI60310220	220	8 5/8	50

d	CODE	L	L	pcs
[mm] [in]		[mm]	[in]	
M12 0.48	AI60312140	140	5 1/2	50
	AI60312160	160	6 1/4	50
	AI60312180	180	7 1/8	50
	AI60312200	200	8	50
	AI60312220	220	8 5/8	50
	AI60312240	240	9 1/2	50
	AI60312280	280	11	50
	AI60312300	300	11 3/4	50

