

UNI ANCHOR PLATE FOR JOISTS

TIMBER-TO-TIMBER


Ideal for fastening joists to platform beams. Suitability of use is guaranteed by the CE marking according to ETA.

UNIQUE MODEL

The same model can be installed on the right or left side of the beam. Two anchors are recommended for each joint.


HURRICANES

Suitable for transferring tensile forces caused by negative wind or hurricane pressures.

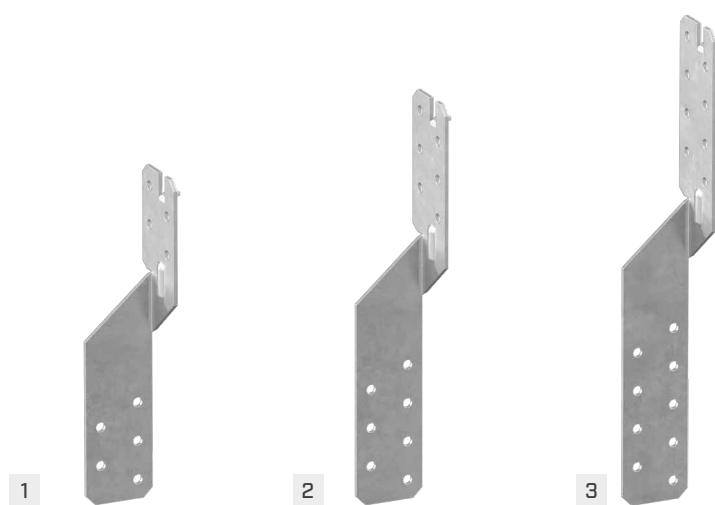

CODES AND DIMENSIONS

CODE	L	B	s	L	B	s	n Ø5 n Ø0.20	pcs
	[mm]	[mm]	[mm]	[in]	[in]	[in]	[pcs]	
1 SPU170	170	36	2	6 3/4	1 7/16	0.08	9	100
2 SPU210	210	36	2	8 1/4	1 7/16	0.08	13	100
3 SPU250	250	36	2	10	1 7/16	0.08	17	100

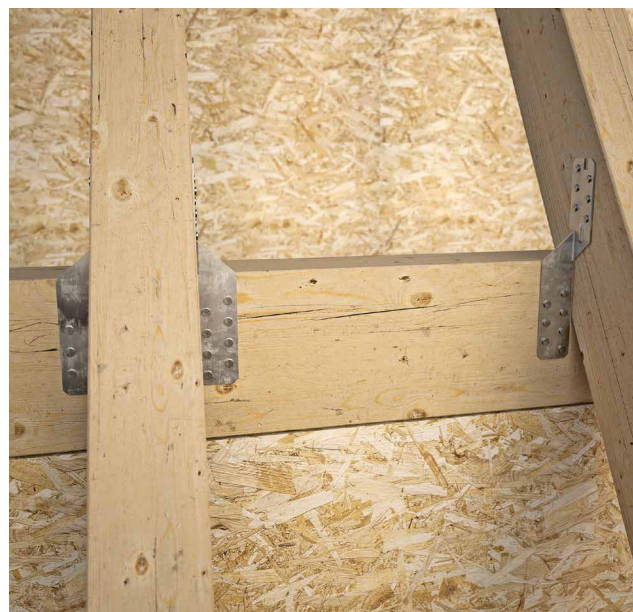


THICKNESS [mm]

2,0 mm

HEIGHT [mm]

170, 210 and 250 mm

GEOMETRY



MATERIAL

S250
Z275 S250GD + Z275 carbon steel

SERVICE CLASS

SC1 SC2



FIELD OF USE

Angle plate to prevent lifting of timber elements.

Can be applied to:

- solid timber and glulam
- LVL
- other timber-based materials